

SP6HL

Petrol generator set
6 kVA, 230 V, 50 Hz

TECHNICAL DATA

• Prime power 230 V	6 kVA / 6 kW
• Voltage	230 V
• Frequency	50 Hz
• Fuel tank capacity	32 l
• Fuel consumption at 75% load	2,0 l/h
• Noise level, Lwa	97 dB
• Weight	83 kgs

ENGINE

• Manufacturer	Honda
• Model	GX 390
• Power at 3600 RPM	13 HP
• Rotation speed	3000 RPM
• Displacement	389 cm ³
• Number of cylinders	1
• Bore / Stroke	88 / 64 mm
• Compression	8,0 : 1
• Cooling	Air cooled
• Ignition system	Transistorized
• Engine oil capacity	1,1 l
• Protection from a low oil level	Yes

ALTERNATOR

• Manufacturer	NSM
• Number of poles	2
• Type	Brushless
• Voltage accuracy	+5%, -10%
• Power factor, Cos φ	1
• Voltage regulator	Capacitor
• Protection level	IP 23
• Insulation class	H





SP6HL

Petrol generator set
6 kVA, 230 V, 50 Hz

EQUIPMENT TABLE


Recoil starter	☒	Wheels and handles kit	☐
1 CEE (32A 230V) and 1 Schuko (16A 230V) sockets	☒	Earthing rod	☐
Thermal overload protection	☒	Automatic voltage regulator (AVR)	☐
Protection from a low oil pressure / level	☒	Electric starter	☐

- ☒ Standard equipment
☐ Optional equipment

OTHER INFORMATION

- Warranty **12 months**
- Warranty for Honda engine **36 months**
- Electric power according to **ISO 8528**

DIMENSIONS

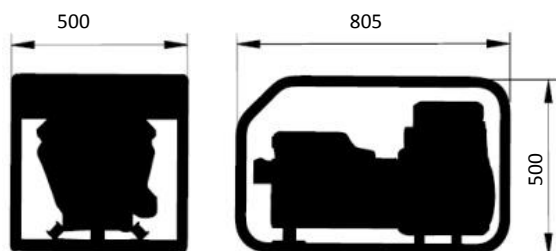

GENERGA
generating sets

UAB "Generga"
Naglio str. 4A
LT - 52367 Kaunas, Lithuania
Tel: +370 37 455456
Email: info@generga.com
www.generga.com



Distributed by

Version : 2017 06