



SP2H

Petrol generator set
2.2 kVA, 230 V, 50 Hz

TECHNICAL DATA

• Prime power 230 V	2,2 kVA / 2,2 kW
• Voltage	230 V
• Frequency	50 Hz
• Fuel tank capacity	3,1 l
• Fuel consumption at 75% load	0,8 l/h
• Noise level, Lwa	94 dB
• Weight	35 kgs



ENGINE

• Manufacturer	Honda
• Model	GX 160
• Power at 3600 RPM	4,8 HP
• Rotation speed	3000 RPM
• Displacement	163 cm ³
• Number of cylinders	1
• Bore / Stroke	68 / 45 mm
• Compression	8,5 : 1
• Cooling	Air cooled
• Ignition system	Transistorized
• Engine oil capacity	0,6 l
• Protection from a low oil level	Yes

ALTERNATOR

• Manufacturer	NSM
• Number of poles	2
• Type	Brushless
• Voltage accuracy	+5%, -12%
• Power factor, Cos φ	1
• Voltage regulator	Capacitor
• Protection level	IP 23
• Insulation class	H

**SP2H**Petrol generator set
2.2 kVA, 230 V, 50 Hz

EQUIPMENT TABLE

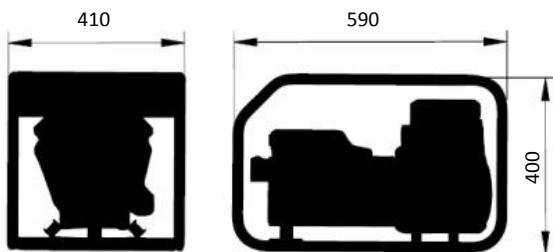
Recoil starter	<input checked="" type="checkbox"/>	Protection from a low oil pressure / level	<input checked="" type="checkbox"/>
2 Schuko 16A sockets	<input checked="" type="checkbox"/>	Earthing rod	<input type="checkbox"/>
Thermal overload protection	<input checked="" type="checkbox"/>		

Standard equipment
 Optional equipment

OTHER INFORMATION

- Warranty **12 months**
- Warranty for Honda engine **36 months**
- Electric power according to **ISO 8528**

DIMENSIONS

**GENERGA**
generating sets

UAB "Generga"
Naglio str. 4A
LT - 52367 Kaunas, Lithuania
Tel: +370 37 455456
Email: info@generga.com
www.generga.com

PC+CE

Distributed by