

# SP3HL

Petrol generator set  
3 kVA, 230 V, 50 Hz

## TECHNICAL DATA

• Prime power 230 V	3 kVA / 3 kW
• Voltage	230 V
• Frequency	50 Hz
• Fuel tank capacity	16 l
• Fuel consumption at 75% load	1,0 l/h
• Noise level, Lwa	96 dB
• Weight	45 kgs

## ENGINE

• Manufacturer	Honda
• Model	GX 200
• Power at 3600 RPM	5,5 HP
• Rotation speed	3000 RPM
• Displacement	196 cm <sup>3</sup>
• Number of cylinders	1
• Bore / Stroke	68 / 54 mm
• Compression	8,5 : 1
• Cooling	Air cooled
• Ignition system	Transistorized
• Engine oil capacity	0,6 l
• Protection from a low oil level	Yes

## ALTERNATOR

• Manufacturer	NSM
• Number of poles	2
• Type	Brushless
• Voltage accuracy	+5%, -10%
• Power factor, Cos φ	1
• Voltage regulator	Capacitor
• Protection level	IP 23
• Insulation class	H





# SP3HL

Petrol generator set  
3 kVA, 230 V, 50 Hz

## EQUIPMENT TABLE


Recoil starter	<input checked="" type="checkbox"/>	Protection from a low oil pressure / level	<input checked="" type="checkbox"/>
2 Schuko 16A sockets	<input checked="" type="checkbox"/>	Earthing rod	<input type="checkbox"/>
Thermal overload protection	<input checked="" type="checkbox"/>		

- Standard equipment
- Optional equipment

## OTHER INFORMATION

- Warranty **12 months**
- Warranty for Honda engine **36 months**
- Electric power according to **ISO 8528**

## DIMENSIONS

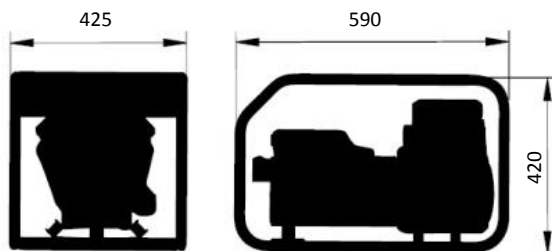

**GENERGA**  
generating sets

**UAB "Generga"**  
Naglio str. 4A  
LT - 52367 Kaunas, Lithuania  
Tel: +370 37 455456  
Email: info@generga.com  
[www.generga.com](http://www.generga.com)



Distributed by