

TP7H

Petrol generator set
7 kVA, 400 V / 230 V, 50 Hz

TECHNICAL DATA

• Prime power 400 V	7 kVA / 5,6 kW
• Prime power 230 V	4,0 kVA / 4,0 kW
• Voltage	400 / 230 V
• Frequency	50 Hz
• Fuel tank capacity	6,1 l
• Fuel consumption at 75% load	2,0 l/h
• Noise level, Lwa	97 dB
• Weight	73 kgs

ENGINE

• Manufacturer	Honda
• Model	GX 390
• Power at 3600 RPM	13 HP
• Rotation speed	3000 RPM
• Displacement	389 cm ³
• Number of cylinders	1
• Bore / Stroke	88 / 64 mm
• Compression	8,0 : 1
• Cooling	Air cooled
• Ignition system	Transistorized
• Engine oil capacity	1,1 l
• Protection from a low oil level	Yes

ALTERNATOR

• Manufacturer	NSM
• Number of poles	2
• Type	With brushes
• Voltage accuracy	+6%, -6%
• Power factor, Cos φ	0,8
• Voltage regulator	Compound
• Protection level	IP 23
• Insulation class	H





TP7H

Petrol generator set
7 kVA, 400 V / 230 V, 50 Hz

EQUIPMENT


Recoil starter	<input checked="" type="checkbox"/>	Wheels and handles kit	<input type="checkbox"/>
Sockets: 1 CEE (16A 400V), 1 Schuko (16A 230V)	<input checked="" type="checkbox"/>	Earthing rod	<input type="checkbox"/>
Thermal overload protection	<input checked="" type="checkbox"/>	Automatic voltage regulator (AVR)	<input type="checkbox"/>
Protection from a low oil pressure / level	<input checked="" type="checkbox"/>	Electric starter	<input type="checkbox"/>

- Standard equipment
- Optional equipment

OTHER INFORMATION

- Warranty **12 months**
- Warranty for Honda engine **36 months**
- Electric power according to **ISO 8528**

DIMENSIONS

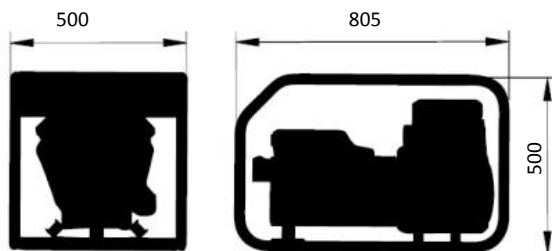

UAB "Generga"
Naglio str. 4A
LT - 52367 Kaunas, Lithuania
Tel: +370 37 455456
Email: info@generga.com
www.generga.com



Distributed by