



## TECHNICAL DATA

|                                |              |
|--------------------------------|--------------|
| • Duty cycle at 35%            | 200 A        |
| • Duty cycle at 60%            | 180 A        |
| • Welding current type         | Alternating  |
| • Electrode diameter           | up to 4 mm   |
| • Generator power              | 6 kVA / 6 kW |
| • Voltage                      | 230 V        |
| • Frequency                    | 50 Hz        |
| • Fuel tank capacity           | 6,1 l        |
| • Fuel consumption at 75% load | 2,4 l/h      |
| • Noise Level, Lwa             | 97 dB        |
| • Weight                       | 93 kg        |

## ENGINE

|                                   |                     |
|-----------------------------------|---------------------|
| • Manufacturer                    | Honda               |
| • Model                           | GX 390              |
| • Power at 3600 RPM               | 13 HP               |
| • Rotation speed                  | 3000 RPM            |
| • Displacement                    | 389 cm <sup>3</sup> |
| • Number of cylinders             | 1                   |
| • Bore / Stroke                   | 88 / 64 mm          |
| • Compression                     | 8,0 : 1             |
| • Cooling                         | Air cooled          |
| • Ignition system                 | Transistorized      |
| • Engine oil capacity             | 1,1 l               |
| • Protection from a low oil level | Yes                 |

## ALTERNATOR

|                             |            |
|-----------------------------|------------|
| • Manufacturer              | NSM        |
| • Number of poles           | 2          |
| • Type                      | Brushless  |
| • Striking voltage          | 45 – 60 V  |
| • Welding current selection | 40 - 200 A |
| • Voltage regulator         | Capacitor  |
| • Protection level          | IP 23      |
| • Insulation class          | H          |

# WP200ACH

Engine driven welder  
200 A – 35%  
180 A – 60%





# WP200ACH

Engine driven welder

200 A – 35%

180 A – 60%

## EQUIPMENT

|  |                                     |                         |                          |
|--|-------------------------------------|-------------------------|--------------------------|
| Recoil starter                             | <input checked="" type="checkbox"/> | Wheels and handles kit  | <input type="checkbox"/> |
| 2 Schuko (16A 230V) sockets                | <input checked="" type="checkbox"/> | Earthing rod            | <input type="checkbox"/> |
| Thermal overload protection                | <input checked="" type="checkbox"/> | 8 m. welding cables kit | <input type="checkbox"/> |
| Protection from a low oil pressure / level | <input checked="" type="checkbox"/> | Electric starter        | <input type="checkbox"/> |
| 4 m. welding cables kit                    | <input checked="" type="checkbox"/> |                         |                          |


Standard equipment

Optional equipment

## OTHER INFORMATION

- Warranty **12 months**
- Warranty for Honda engine **36 months**
- Electric power according to **ISO 8528**

## DIMENSIONS

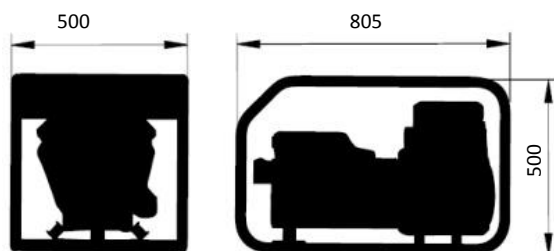

**UAB "Generga"**  
 Naglio str. 4A  
 LT - 52367 Kaunas, Lithuania  
 Tel: +370 37 455456  
 Email: info@generga.com  
[www.generga.com](http://www.generga.com)



Distributed by