

TP15K

Petrol generator set
15 kVA, 400 V / 230 V, 50 Hz

TECHNICAL DATA

• Prime power 400 V	15 kVA / 12 kW
• Prime power 230 V	8 kVA / 8 kW
• Voltage	400 / 230 V
• Frequency	50 Hz
• Fuel tank capacity	20 l
• Fuel consumption at 75% load	5,4 l/h
• Noise level, Lwa	97 dB
• Weight	138 kgs

ENGINE

• Manufacturer	Kohler
• Model	CH680
• Power at 3600 RPM	22 HP
• Rotation speed	3000 RPM
• Displacement	674 cm ³
• Number of cylinders	2
• Bore / Stroke	80 / 67 mm
• Compression	8,5 : 1
• Cooling	Air cooled
• Ignition system	Transistorized
• Engine oil capacity	1,9 l
• Protection from a low oil level	Yes

ALTERNATOR

• Manufacturer	NSM
• Number of poles	2
• Type	With brushes
• Voltage accuracy	+5%, -5%
• Power factor, Cos ϕ	0,8
• Voltage regulator	Compound
• Protection level	IP 23
• Insulation class	H





TP15K

Petrol generator set
15 kVA, 400 V / 230 V, 50 Hz

EQUIPMENT


Electric starter	☒	Protection from a low oil pressure / level	☒
Sockets: 1 CEE (32A 400V), 1 CEE (32A 230V)	☒	Earthing rod	☐
Thermal overload protection	☒	Wheels and handles kit	☐

- ☒ Standard equipment
☐ Optional equipment

OTHER INFORMATION

- Warranty **12 months**
- Electric power according to **ISO 8528**

DIMENSIONS

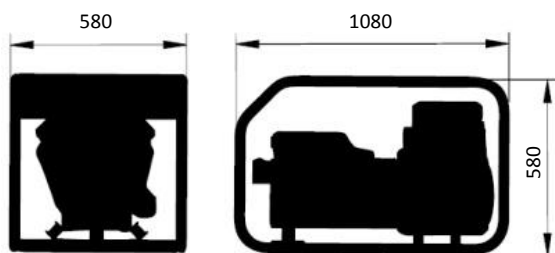

UAB "Generga"
Naglio str. 4A
LT - 52367 Kaunas, Lithuania
Tel: +370 37 455456
Email: info@generga.com
www.generga.com



Distributed by