



WP220DCH

Engine driven welder

220 A – 35%

170 A – 60%



TECHNICAL DATA

• Duty cycle at 35%	220 A
• Duty cycle at 60%	170 A
• Welding current type	Direct
• Electrode diameter	up to 5 mm
• Generator power 400 V	6,5 kVA / 5,2 kW
• Generator power 230 V	3,5 kVA / 3,5 kW
• Voltage	400 / 230 V
• Frequency	50 Hz
• Fuel tank capacity	6,1 l
• Fuel consumption at 75% load	2,4 l/h
• Noise level, Lwa	97 dB
• Weight	93 kg

ENGINE

• Manufacturer	Honda
• Model	GX 390
• Power at 3600 RPM	13 HP
• Rotation speed	3000 RPM
• Displacement	389 cm ³
• Number of cylinders	1
• Bore / Stroke	88 / 64 mm
• Compression	8,0 : 1
• Cooling	Air cooled
• Ignition system	Transistorized
• Engine oil capacity	1,1 l
• Protection from a low oil level	Yes

ALTERNATOR

• Manufacturer	NSM
• Number of poles	2
• Type	With brushes
• Striking voltage	65 – 85 V
• Welding current selection	40 - 220 A
• Voltage regulator	Compound
• Protection level	IP 23
• Insulation class	H



WP2200CH

Engine driven welder

220 A – 35%

170 A – 60%

EQUIPMENT

Recoil starter	<input checked="" type="checkbox"/>	Wheels and handles kit	<input type="checkbox"/>
Sockets: 1 CEE (16A 400V) and 1 Schuko (16A 230V)	<input checked="" type="checkbox"/>	Earthing rod	<input type="checkbox"/>
Thermal overload protection	<input checked="" type="checkbox"/>	8 m. welding cables kit	<input type="checkbox"/>
Shut down at the oil shortage	<input checked="" type="checkbox"/>	Electric starter	<input type="checkbox"/>
4 m. welding cables kit	<input checked="" type="checkbox"/>		


Standard equipment

Optional equipment

OTHER INFORMATION

- Warranty **12 months**
- Warranty for Honda engine **36 months**
- Electric power according to **ISO 8528**

DIMENSIONS

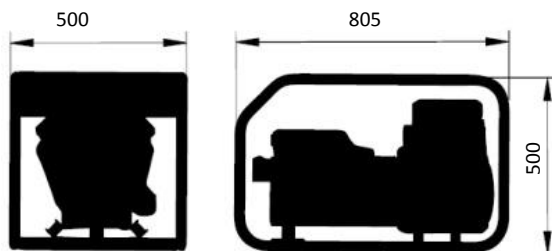

UAB "Generga"
 Naglio str. 4A
 LT - 52367 Kaunas, Lithuania
 Tel: +370 37 455456
 Email: info@generga.com
www.generga.com



Distributed by